



STOREBRO

TRUE SCANDINAVIAN

Specification

STOREBRO ROYAL CRUISER 410 COMMANDER





MAIN CHARACTERISTICS

- Length: 12.5 m /41 ft
- Beam (B max): 3.9 m /12 ft 10 in
- Draft: 0.9 m /3 ft
- Displacement: approx. 9 tons (excl. fuel and water)
- Fuel tank capacity: 2 x 500 litres /2 x 132 US Gal
- Fresh water tank capacity: 400 litres /106 US Gal
- Holding tank capacity: 150 litres /40 US Gal
- Power supply: 12V DC
- Batteries: Start 1 x 12V /185 Ah, Service 3 x 12V /185 Ah
- Engines: 2 x Volvo Penta D 6, 229 kW (310 hp) diesel

Hull, deck and superstructure

- Comprehensive hull stringer reinforcement system
- Hull, deck and topsides in sandwich laminate
- Hand-laid fiberglass
- Top layers of hull laminate with ISO-polyester

Interior

- Selected Khaya mahogany with satin finish varnish

STANDARD EQUIPMENT

Deck

- Anchor light
- Anchor windlass fore including 40 m line, 2 m chain and 15 kg anchor
- Boat hook

- Deck discharge for holding tank
- Fenders (6)
- Flagpole
- Horn
- Manual bilge pump
- Mooring lines (4)
- Mooring bollards, three pairs in stainless steel
- Navigation lights in accordance with international standards
- Safety glass windows
- Shower on transom with hot and cold water
- Stainless steel pulpit and handrails
- Stainless steel window and skylight frames
- Swim platform with stainless steel swim ladder
- Windscreens, curved for increased strength

Flying bridge

- Compass, Silva
- Covers for driver and navigator seats and instrument consol
- Echosounder/Log repeater
- Electronic engine controls
- Engine monitoring panel with warning lights for temperature, oil-pressure and electric charging
- Foldable radar mast
- Glass holders
- Helmsman and navigator seats on reversible pedestals
- L-sofa with storage and cushions in blue canvas
- Outlet 12 V



- RPM gauges
- Railings in stainless steel
- Table
- Trimtab controls

Master stateroom (fore)

- Direct access to WC and shower
- Double berth, 2 m long
- Ceiling and berth lights
- Lockers
- Mattresses with top mattresses
- Mirror
- Opening skylight to fore deck
- Opening portlights
- Outlet, 230V
- Wardrobes with lighting, cupboards and shelves

Master head

- Access from master cabin
- Counter top in high gloss varnished mahogany with wash basin in polished stainless steel
- General lighting
- Lockers and shelves
- Mirror
- Opening portlight
- Pressurized hot and cold water
- Separate shower cabin with electric shower drainage pump

- Teak grating on floor
- WC with electric flushing

Guest cabin (Starboard side)

- Ceiling and berth lights
- Mattresses with top mattresses
- Opening portlight
- Outlet 230V
- Wardrobe cupboards
- Two separate berths with storage under

Guest head

- Access from guest cabin
- Counter top in high gloss varnished mahogany with wash basin in polished stainless steel
- Electric shower drain pump
- General lighting
- Hand-held shower
- Locker and shelves
- Mirror
- Opening portlight
- Outlet 230V
- Pressurized hot and cold water
- Teak grating on floor
- WC with electric flushing





Galley

- Counter top in mahogany with double sinks in stainless steel
- Cutting boards
- Electric refrigerator 130 liter
- Extractor fan with cabinet
- General lighting
- Outlets, 12V and 230V
- Pressurized hot and cold water
- Storage lockers
- Stove with oven, gas

Deck Saloon

- Book shelf
- Ceiling, cornice and bracket lights
- Outlets, 12V and 230V
- Rounded sofa with blue upholstery, and table
- Sliding glass door to aft deck

Pilot House

- Door to side deck on both sides
- Helmsman seat
- Passenger sofa
- Stairs to flying bridge

Helmsman's position includes:

- Chart light
- Chart table
- Cigarette lighter/12V outlet

- Compass, Silva
- Controls for trimtabs
- Echosounder/Log
- Electronic engine controls and monitoring panel with warning lights for temperature, oilpressure and electric charging
- Gauges for; fuel, freshwater, engine temperature and oil pressure in engines and gears
- Hydraulic steering
- RPM gauges with integrated hour meters
- Windscreen wipers (3) of parallel type with intermittent relays and wind-screen washers

Engine room

- Fuel tanks in stainless steel
- Twin engines, flexibly mounted, each with alternator

Aft cockpit

- Deck lighting
- Hatch with locking system to hold under cockpit floor
- Life ring with heaving line and light
- L-sofa with cushions and table
- Railing in stainless steel
- Stairs to flying bridge in fibre glass
- Stairs to side decks
- Steplights
- Teak on deck, stairs to flying bridge and side stairs
- Transom door





Hold (aft)

- Batteries
- Fresh water tanks
- Fuel-and seawater filters
- Lighting
- Outlets, 12V and 230V
- Freshwater pump
- Storage space

Miscellaneous

- Electric submersible bilge pumps (3)
- Engine room fire extinguisher
- First aid kit
- Holding tank in stainless steel
- Fire extinguishers hand operated (3)
- Fresh water heater
- Manual bilge pump
- Shore power system and shore line
- Tool box

Builders

- Storebro Bruks AB


Design

- John H. V. Lindblom/Storebro Bruks AB

Quality and product security systems and Certification

- The boat is built under the regulations in ISO 9002 quality system
- The construction of the complete boat is approved by Det Norske Veritas, CE certificate category B

Certain extra equipment may appear in the manufacturers publications. The manufacturer reserves the right to change the technical specification, equipment and data without prior notice.

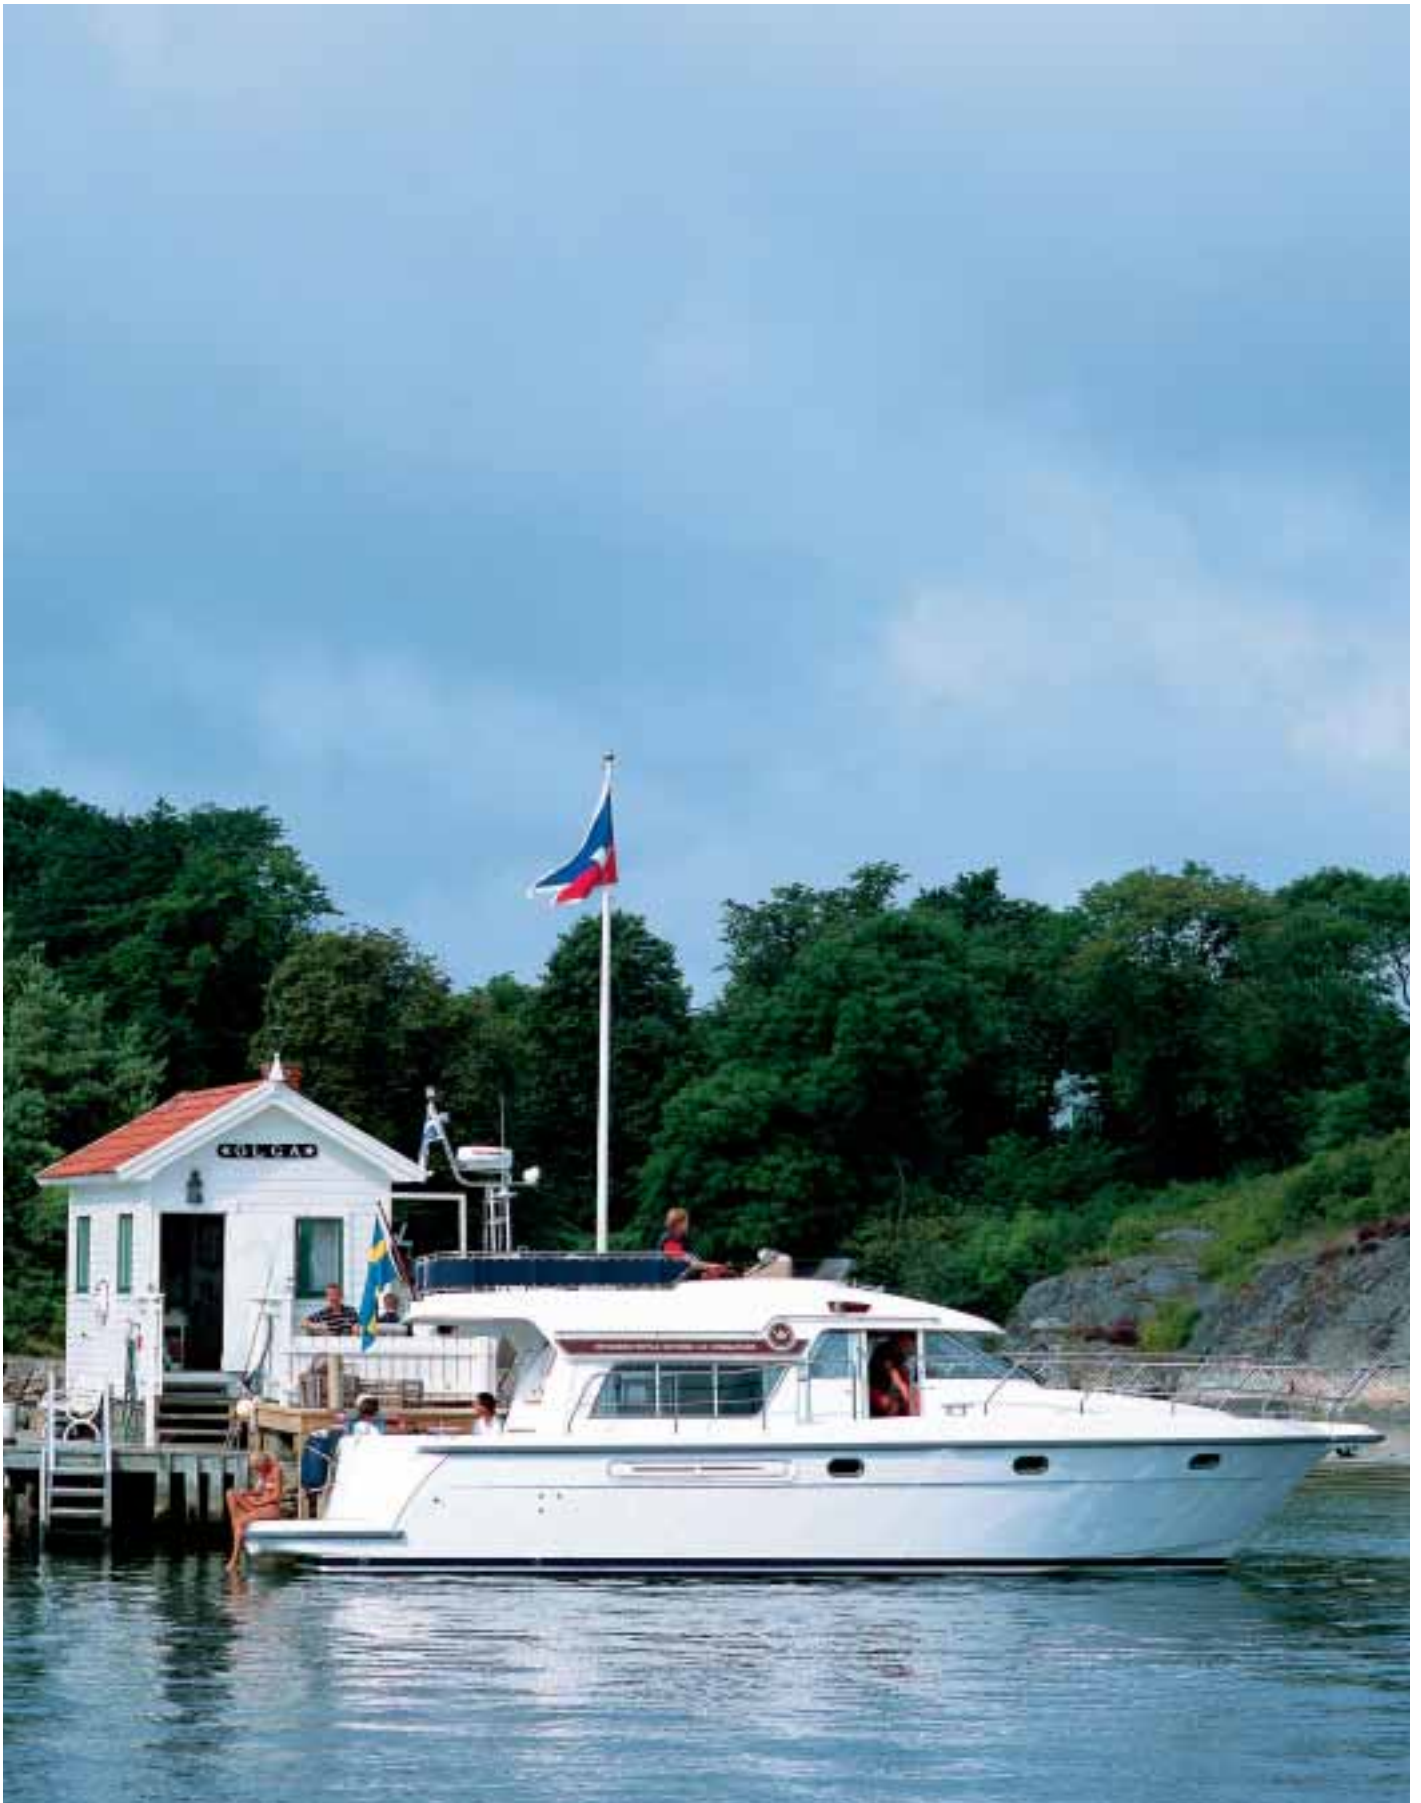

Storebro Bruks AB
SE-590 83 Storebro, Sweden
Tel: + 46 492 195 00, Fax: + 46 492 303 00
e-mail: info@storebro.se
Internet: www.storebro.se