



COMMANDER

The Yachtsman's Yacht



STOREBRO 410 COMMANDER

Specification



MAIN CHARACTERISTICS

- Length: 12.5 m /41 ft
- Beam (B max): 3.9 m /12 ft 10 in
- Draft: 0.9 m /3 ft
- Displacement: approx. 9 tons (excl. fuel and water)
- Fuel tank capacity: 2 x 500 litres /2 x 132 US Gal
- Fresh water tank capacity: 400 litres /106 US Gal
- Holding tank capacity: 150 litres /40 US Gal
- Power supply: 12V DC
- Batteries: Start 1 x 12V /185 Ah, Service 3 x 12V /185 Ah
- Engines: 2 x Volvo Penta D 6, 229 kW (310 hp) diesel

Hull, deck and superstructure

- Comprehensive hull stringer reinforcement system
- Hull, deck and topsides in sandwich laminate
- Hand-laid fiberglass
- Top layers of hull laminate with ISO-polyester

Interior

- Selected Khaya mahogany with satin finish varnish

STANDARD EQUIPMENT

Deck

- Anchor light
- Anchor windlass fore including 40-m line, 2 m chain and 15 kg anchor
- Boat hook
- Deck discharge for holding tank
- Fenders (6)

- Flagpole
- Horn
- Manual bilge pump
- Mooring lines (4)
- Mooring bollards, three pairs in stainless steel
- Navigation lights in accordance with international standards
- Safety glass windows
- Shower on transom with hot and cold water
- Stainless steel pulpit and handrails
- Stainless steel window and skylight frames
- Swim platform with stainless steel swim ladder
- Windscreens, curved for increased strength

Flying bridge

- Compass, Silva
- Covers for driver and navigator seats and instrument consol
- Echosounder/Log repeater
- Electronic engine controls
- Engine monitoring panel with warning lights for temperature, oilpressure and electric charging
- Foldable radar mast
- Glass holders
- Helmsman and navigator seats on reversible pedestals
- L-sofa with storage and cushions in blue canvas
- Outlet 12 V
- RPM gauges
- Railings in stainless steel
- Table
- Trimtab controls

Master stateroom (fore)

- Direct access to WC and shower
- Double berth, 2 m long
- Ceiling and berth lights
- Lockers
- Mattresses with top mattresses
- Mirror
- Opening skylight to fore deck
- Opening portlights
- Outlet, 230V
- Wardrobes with lighting, cupboards and shelves

Master head

- Access from master cabin
- Counter top in high gloss varnished mahogany with wash basin in polished stainless steel
- General lighting
- Lockers and shelves
- Mirror
- Opening portlight
- Pressurized hot and cold water
- Separate shower cabin with electric shower drainage pump
- Teak grating on floor
- WC with electric flushing

Guest cabin (Starboard side)


- Ceiling and berth lights
- Mattresses with top mattresses
- Opening portlight
- Outlet 230V
- Wardrobe cupboards
- Two separate berths with storage under

Guest head

- Access from guest cabin
- Counter top in high gloss varnished mahogany with wash basin in polished stainless steel
- Electric shower drain pump
- General lighting
- Hand-held shower
- Locker and shelves
- Mirror
- Opening portlight
- Outlet 230V
- Pressurized hot and cold water
- Teak grating on floor
- WC with electric flushing

Galley

- Counter top in mahogany with double sinks in stainless steel
- Cutting boards
- Electric refrigerator 130 liter
- Extractor fan with cabinet
- General lighting
- Outlets, 12V and 230V
- Pressurized hot and cold water
- Storage lockers
- Stove with oven, gas

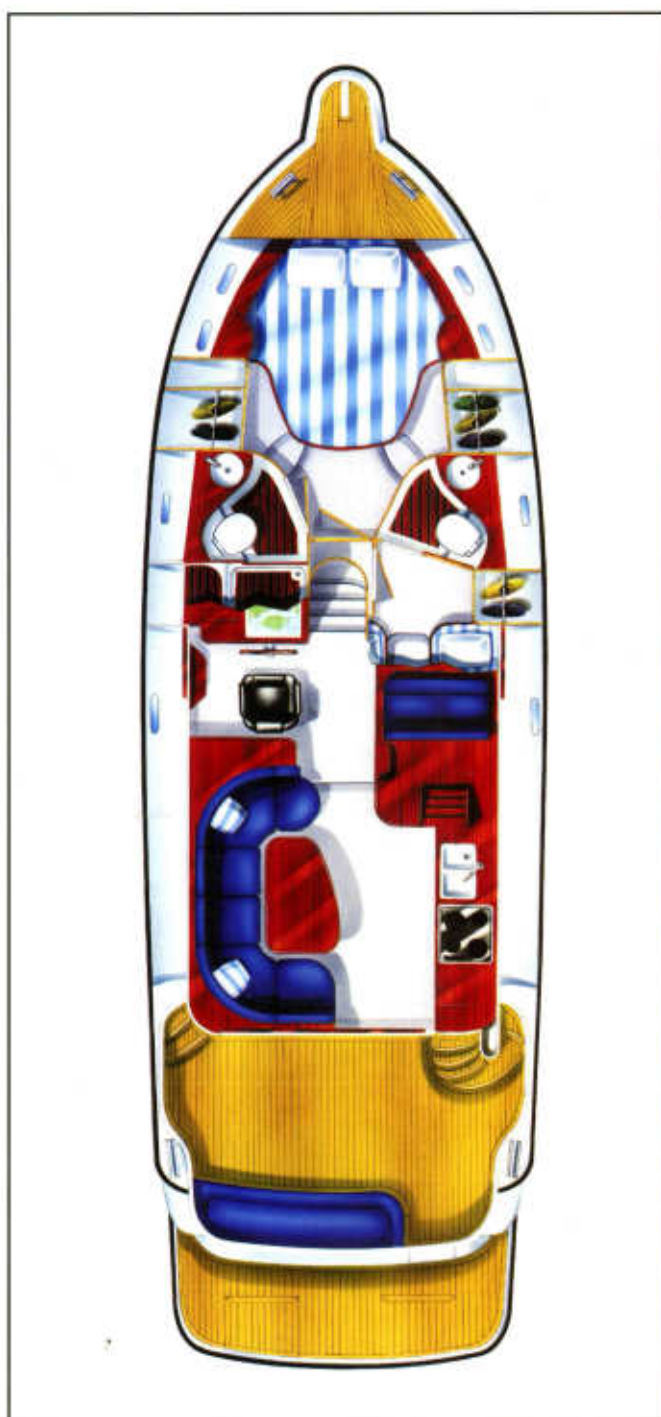





Deck Saloon

- Book shelf
- Ceiling, corniche and bracket lights
- Outlets, 12V and 230V
- Rounded sofa with blue upholstery, and table
- Sliding glass door to aft deck

Pilot House

- Door to side deck on both sides
- Helmsman seat
- Passenger sofa
- Stairs to flying bridge

Helmsman's position includes:

- Chart light
- Chart table
- Cigarette lighter/12V outlet
- Compass, Silva
- Controls for trimtabs
- Echosounder/Log
- Electronic engine controls and monitoring panel with warning lights for temperature, oil pressure and electric charging
- Gauges for; fuel, freshwater, engine temperature and oil pressure in engines and gears
- Hydraulic steering
- RPM gauges with integrated hour meters

- Windscreen wipers (3) of parallel type with intermittent relays and wind-screen washers

Engine room

- Fuel tanks in stainless steel
- Twin engines, flexibly mounted, each with alternator

Aft cockpit

- Deck lighting
- Hatch with locking system to hold under cockpit floor
- Life ring with heaving line and light
- L-sofa with cushions and table
- Railing in stainless steel
- Stairs to flying bridge in fibre glass
- Stairs to side decks
- Steplights
- Teak on deck, stairs to flying bridge and side stairs
- Transom door

Hold (aft)

- Batteries
- Fresh water tanks
- Fuel-and seawater filters
- Lighting
- Outlets, 12V and 230V
- Freshwater pump
- Storage space





Miscellaneous

- Electric submersible bilge pumps (3)
- Engine room fire extinguisher
- First aid kit
- Holding tank in stainless steel
- Fire extinguishers hand operated (3)
- Fresh water heater
- Manual bilge pump
- Shore power system and shore line
- Tool box

Builders

- Storebro Bruks AB

Design

- John H. V. Lindblom/Storebro Bruks AB

Quality and product security systems and Certification

- The boat is built under the regulations in ISO 9002 quality system
- The construction of the complete boat is approved by Det Norske Veritas, CE certificate category B

Certain extra equipment may appear in the manufacturers publications. The manufacturer reserves the right to change the technical specification, equipment and data without prior notice.





TAKE COMMAND



475 COMMANDER



410 COMMANDER



380 COMMANDER



340 COMMANDER



NIMBUS BOATS

NIMBUS BOATS AB • BOX 5152 • GKSS-HARBOUR • 426 76 VÄSTRA FRÖLUNDA (GOTHENBURG) • SWEDEN
PHONE +46 (0)31-69 77 00 • FAX +46 (0)31-29 46 98 • E-MAIL INFO@NIMBUS.SE
INTERNET WWW.NIMBUS.SE / WWW.STOREBRO.SE